

# ECL-VAVS

LONMARK<sup>®</sup> Certified 9-Point Programmable Controller



## Overview

The ECL-VAVS controllers are microprocessor-based programmable variable air volume (VAV) controllers designed to control cooling only and cooling with reheat single duct variable air volume boxes.

Each controller uses the LonTalk<sup>®</sup> communication protocol and is LONMARK certified as an SCC VAV.



## Features & Benefits

- Internal power supply uses power factor correction (PFC) to optimize power usage when multiple controllers are connected at the same power transformer
- Flexible inputs and outputs support all industry-standard VAV unitary applications
- Rugged hardware inputs and outputs eliminate the need for external protection equipment
- Polarity free, on-board airflow sensor for precise airflow monitoring and control at low and high airflow rates
- Built-in actuator with an integrated position feedback system for worry-free operation
- Factory pre-loaded applications allow for out-of-the-box, energy efficient operation of standard VAV equipment
- Optimized air balancing through *myDC* AirBalancing saving time during the commissioning process
- Supports EC-*gfx*Program, making Building Automation System programming effortless
- Open-to-Wireless<sup>™</sup> ready, supporting a wide variety of wireless sensors and switches and helping to reduce installation costs
- Supports the Allure<sup>™</sup> Series Communicating Sensors, providing intelligent sensing and environmental zone control

# Model Selection

## Example: ECL-VAVS

Series	Model
ECL-	VAVS: 9 points, flow sensor, damper actuator, 3 UI, 3 DO, 1 UO

### Accessories

Terminal covers	Terminal cover designed to conceal the controller's wire terminals. Required to meet local safety regulations in certain jurisdictions.
-----------------	---

## Recommended Applications

Model	ECL-VAVS
Cooling Only VAV Boxes	■
Cooling with Reheat VAV Boxes	■
Room Pressurization	■

## Objects List

### Objects

Calendar Objects	1
Special events per calendar	25
Schedule Objects	2
Special events per schedule	5
PID Loop Objects	8

### Constants

Boolean	124
Enumeration	62
Numeric	56

### Variables

Boolean	124
Enumeration	54
Numeric	56
nciSetpoint	Yes
Total Network Variables	166

### Network Variable Input (General Usage)

NVI Changeable Type, 50  
Up to 31 Bytes

### Network Variable Output (General Usage)

NVO Changeable Type, 50  
Up to 31 Bytes

### Hardware Input Network Variable

nvoHwInput per Hardware Input Yes

### Hardware Output Network Variable

nviHwInput per Hardware Output Yes

nvoHwInput per Hardware Output Yes

## Product Specifications

### Power Supply Input

Voltage Range <sup>1</sup>	24VAC/DC; ±15%; Class 2
Frequency Range	50/60Hz
Overcurrent Protection	Field replaceable fuse
Fuse Type	3.0A
Power Consumption	4 VA typical plus all external loads <sup>2</sup> , 75 VA max (including powered triac outputs).

- 24VDC does not support DO (triac outputs).
- External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

### LonMark Functional Profile

Input Objects	Open-Loop Sensor #1
Output Objects	Open-Loop Actuator #3
Node Object	Node Object #0
Real Time Clock	Real Time Keeper #3300
Scheduler	Scheduler #20020
Calendar	Calendar #20030
Programmable Device	Static Programmable Device #410
SCC Object	SCC VAV #8502

### Communications

Communications	LonTalk Protocol
Transceiver	FT 5000 Free Topology Smart Transceiver
Channel	TP/FT-10; 78Kbps
LonMark Interoperability Guidelines	Version 3.4
Device Class	SCC VAV

## Subnetwork

Communication	RS-485
Cable	Cat 5e, 8 conductor twisted pair
Connector	RJ-45
Connection Topology	Daisy-chain
Maximum number of room devices supported per controller combined	4 <sup>1</sup>

1. A controller can support a maximum of 2 Allure sensor models equipped with a CO<sub>2</sub> sensor. Any remaining connected sensors must be without a CO<sub>2</sub> sensor.

## Hardware

Processor	STM32 (ARM Cortex™ M3) MCU, 32 bit
CPU Speed	68 MHz
Applications Memory	384 kB Non-volatile Flash
Storage Memory	1 MB Non-volatile Flash
Memory (RAM)	64 kB RAM
Real Time Clock (RTC)	Built-in Real Time Clock without battery Network time synchronization is required at each power-up cycle before the RTC become available
Green LEDs	Power status & LAN Tx
Orange LEDs	Controller status & LAN Rx

## Wireless Receiver

Communication Protocol	EnOcean wireless standard <sup>1</sup>
Number of Wireless Inputs <sup>2</sup>	18
Supported Wireless Receivers	Refer to the Open-to-Wireless Application Guide
Cable	Telephone cord
Connector	4P4C modular jack
Length (maximum)	6.5ft (2m)



1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Application Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

## Integrated Damper Actuator

Motor	Belimo brushless DC motor
Torque	45 in-lb, 5 Nm
Degrees of Rotation	95° adjustable
Shaft Diameter	5/16 to 3/4"; 8.5 to 18.2mm
Acoustic Noise Level	< 35 dB (A) @ 95° rotation in 95 seconds

## Mechanical

Dimensions (H × W × D)	7.90 × 5.51 × 3.70" (200.61 × 139.93 × 94.04 mm)
Dimensions with terminal block covers (H × W × D)	7.90 × 10.84 × 3.70" (200.61 × 275.26 × 94.04 mm)
Shipping Weight (Controller)	1.35lbs (0.61 kg)
Shipping Weight (Terminal Cover (one side, bulk packaged))	0.30lbs (0.14 kg)
Enclosure Material <sup>1</sup>	FR/ABS
Enclosure Rating	Plastic housing, UL94-5VB flammability rating Plenum rating per UL1995

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

## Environmental

Operating Temperature	32°F to 122°F (0°C to 50°C)
Storage Temperature	-4°F to 122°F (-20°C to 50°C)
Relative Humidity	0 to 90% Non-condensing

## Standards and Regulation

CE Emission	EN61000-6-3: 2007; A1:2011
CE Immunity	EN61000-6-1: 2007
FCC	Compliance with FCC rules part 15, subpart B, class B
UL Listed (CDN & US)	UL916 Energy management equipment
CEC Appliance Database	Appliance Efficiency Program <sup>1</sup>



1. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.

## On-Board Air-Flow Sensor

Differential Pressure Range	±2.0 in. W.C. (±500 Pa) Polarity-free high-low sensor connection
Input Resolution	0.00007 in. W.C. (0.0167 Pa)
Air Flow Accuracy	±4.0% @ > 0.05 in. W.C. (12.5 Pa) ±1.5% once calibrated through air flow balancing @ > 0.05 in. W.C. (12.5 Pa)
Pressure Sensor Accuracy	±(0.2 Pa +3% of reading)

## Universal Inputs (UI)

### General

Input Type	Universal; software configurable
Input Resolution	12-Bit analog / digital converter

### Contact

Type	Dry contact
------	-------------

### Counter

Type	Dry contact
Maximum Frequency	1Hz maximum
Minimum Duty Cycle	500ms On / 500ms Off

### 0 to 10VDC

Range	0 to 10VDC (40kΩ input impedance)
-------	--------------------------------------

### 0 to 20mA

Range	0 to 20mA 165Ω external resistor wired in parallel
-------	---

### Resistance/Thermistor

Range	0 to 350 KΩ
Thermistor	10KΩ Type 2, 3 (10KΩ @ 77°F; 25°C)

## Universal Outputs (UO)

### General

Output Type	Universal; software configurable
Output Resolution	10-bit digital to analog converter
Output Protection	Built-in snubbing diode to protect against back-EMF, for example when used with a 12VDC relay Output is internally protected against short circuits
Load Resistance	Minimum 600 $\Omega$ for 0-10VDC and 0-12VDC outputs
Auto-reset fuse	Provides 24VAC over voltage protection

### 0 or 12VDC (On/Off)

Range	0 or 12VDC
Source Current	Maximum 10 mA at 12VDC or 20 mA at 11VDC

### PWM

Range	Adjustable period from 2 to 65 seconds
-------	--

Thermal Actuator Management	Adjustable warm up and cool down time
-----------------------------	---------------------------------------

### Floating

Minimum Pulse On/Off Time	500 milliseconds
Drive Time Period	Adjustable

## 0 to 10VDC

Range	0 to 10VDC
Source Current	Maximum 20 mA at 10VDC (minimum load resistance 600 $\Omega$ )
Sink Current	Maximum 2.5mA at 1 VDC (minimum load resistance 4K $\Omega$ )

## Digital Outputs (DO)

### General

Output Type	24VAC Triac; software configurable
Maximum Current per Output	0.5A continuous 1A @ 15% duty cycle for a 10-minute period
Power Source	Internal power supply

### 0 or 24VAC (On/Off)

Range	0 or 24VAC
-------	------------

### PWM

Range	Adjustable period from 2 to 65 seconds
-------	--

### Floating

Minimum Pulse On/Off Time	500 milliseconds
Drive Time Period	Adjustable
Power Source	Internal power supply

# Dimensions

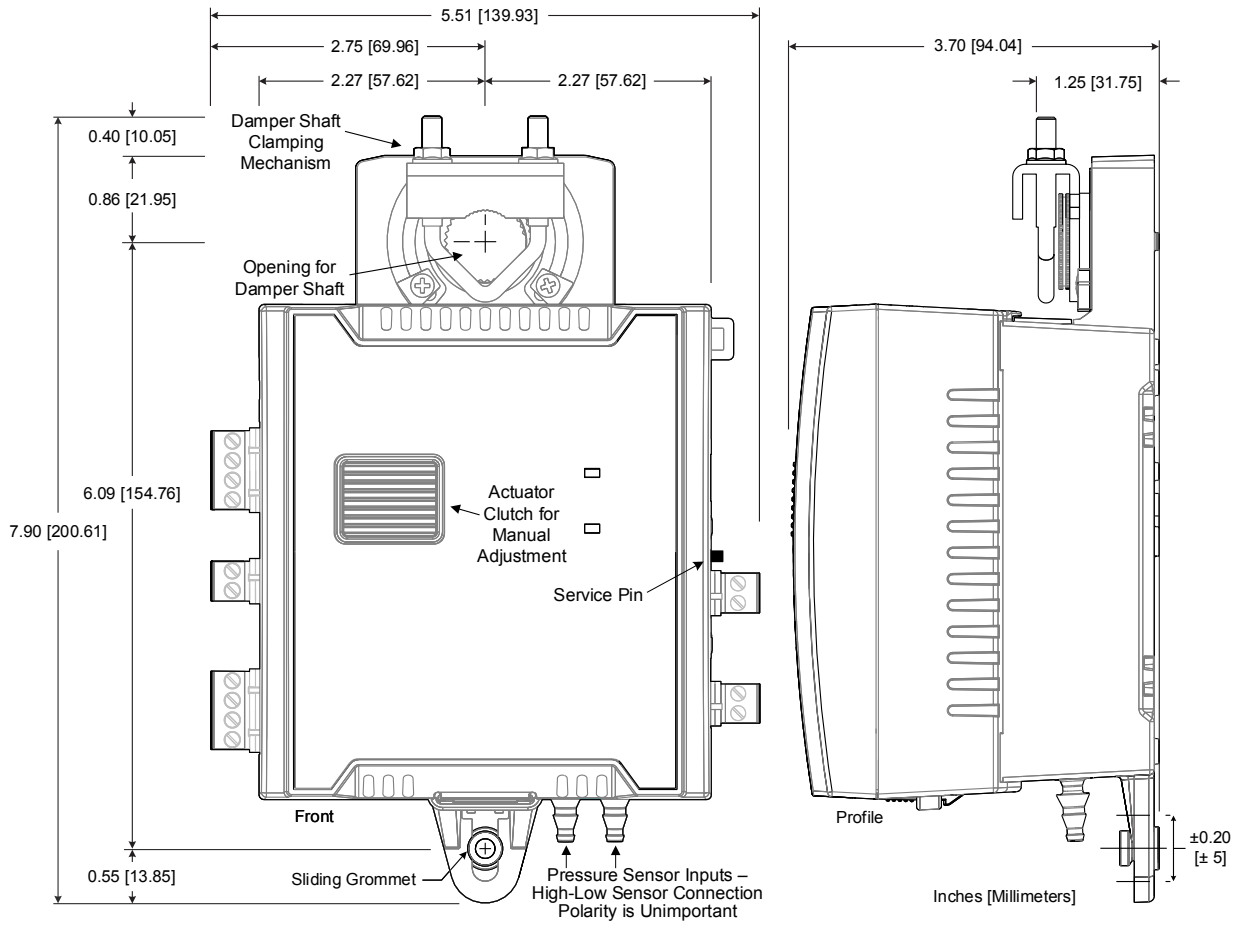


Figure 1: ECL-VAVS Controller Dimensions


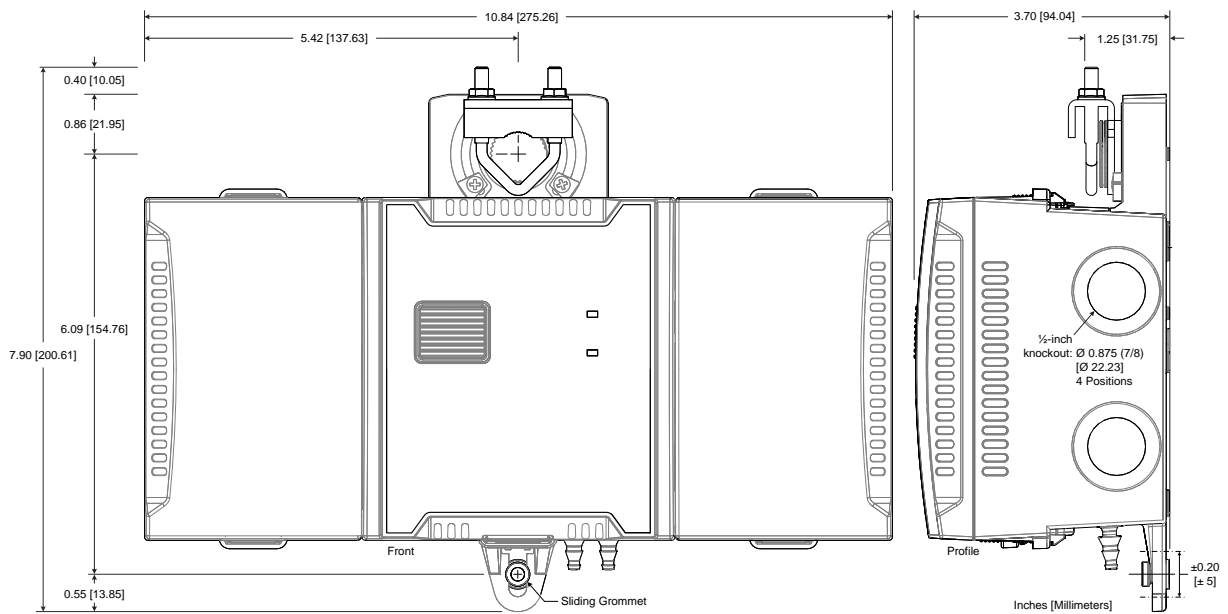


Figure 2: ECL-VAVS Controller with Terminal Covers Dimensions

# Functional Profile

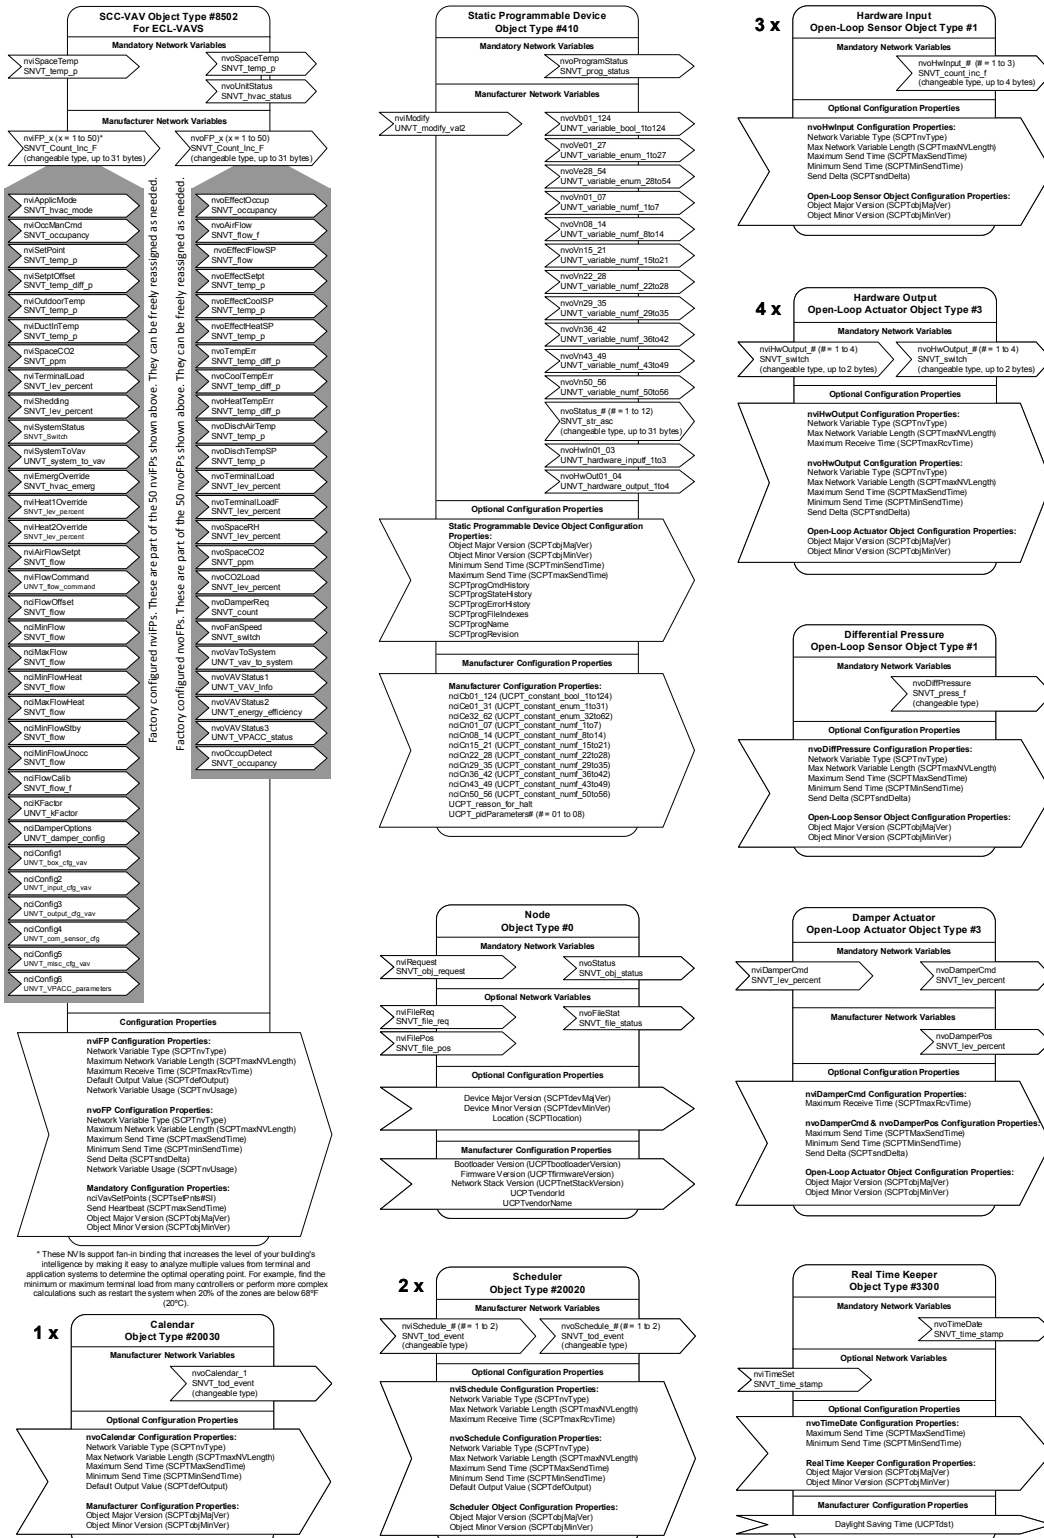

\* This NvS support fan-in binding that increases the level of your building's intelligence by making it easy to analyze multiple values from terminal and application systems to determine the optimal operating point. For example, find the minimum or maximum terminal load from many controllers or perform more complex calculations such as restart the system when 20% of the zones are below 68°F (20°C).

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, EC-Net, ECO-Vue, Allure, and Open-To-Wireless are trademarks of Distech Controls Inc.; Lon-Works, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; Niagara Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2017 - 2022. All rights reserved.

Global Head Office - 4205 place de Java, Brossard, QC, Canada, J4Y 0C4 - EU Head Office - ZAC de Sacuny, 558 avenue Marcel Mérioux, 69530 Brignais, France