

ECB-600 Series

BACnet B-AAC 28-Point
Programmable Controllers



Overview

The ECB-600 Series controllers are microprocessor-based programmable controllers designed to control various building automation applications such as air handling units, chillers, boilers, pumps, cooling towers, and central plant applications. This series supports up to two ECx-400 Series I/O extension modules.

This controller uses the BACnet[®] MS/TP LAN communication protocol and is BTL[®]-Listed as BACnet Advanced Application Controllers (B-AAC).



Features & Benefits

- Flexible inputs and outputs support all industry-standard HVAC unitary applications
- Rugged hardware inputs and outputs eliminate the need for external protection equipment
- Models available with HOA switches and potentiometers are ideal for equipment testing or commissioning
- An optional full-color backlit display with jog dial provides direct access to a wide range of controller functions
- Supports EC-*gfx*Program, making Building Automation System programming effortless
- Open-to-Wireless[™] ready, supporting a wide variety of wireless sensors and switches and helping to reduce installation costs
- Supports the Allure[™] Series Communicating Sensors, providing intelligent sensing and environmental zone control

Model Selection

Example: ECB-600

Series	Model	Options
ECB-	600 : 28 Points, 15Vdc Power Supply, 16 UI, 12 UO	UUKL : UL 864, 10 th Edition UUKL and California State Fire Marshal Listed ¹
	610 : 28 Points, 15Vdc Power Supply, 16 UI, 12 UO, HOA	
	650 : 28 Points, 15Vdc Power Supply, 16 UI, 12 UO, Color Display	

1. The UL 864 UUKL Listed Smoke Control Equipment is used only in Distech Controls' UUKL smoke control system. For detailed specifications, requirements and procedures for installing and operating UUKL Listed equipment refer to the Distech Controls' UUKL Smoke Control documentation.

Recommended Applications

Model	ECB-600 / 610 / 650	ECB-600 UUKL
Air Handling Unit	■	■
Multi-Zone Application	■	
Chiller	■	
Boiler	■	
Cooling Tower	■	
Central Plant	■	
Exhaust Fan		■

BACnet Objects List

BACnet Objects

Calendar Objects	2
Events per calendar	45
Schedule Objects	10
Special events per schedule	10
PID Loop Objects	30
Input Objects (AI, BI, MSI) ¹	68 ²
Output Objects (AO, BO) ¹	12 ³
Alarm Notification Classes	5

1. Supports object internally-generated alarms (intrinsic reporting).
2. This consists of Hardware Inputs, Allure Series Communicating Sensor Inputs, and Open-to-Wireless Inputs.
3. This consists of Hardware Outputs.

Commandable Objects¹

BV Objects	20
MSV Objects	20
AV Objects	35

Non-Commandable Objects

BV Objects	55
MSV Objects	55
AV Objects	115

1. Supports object internally-generated alarms (intrinsic reporting).

Product Specifications

Power Supply Input

Voltage Range	24VAC/DC; ±15%; Class 2
Frequency Range	50/60Hz
Overcurrent Protection	Field replaceable fuse
Fuse Type	3.0A
Power Consumption ECB-600 / ECB-610	22 VA typical plus all external loads ¹ , 65 VA max.
Power Consumption ECB-650	25 VA typical plus all external loads ¹ , 68 VA max.

1. External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

Communications

Communication Bus	BACnet MS/TP
BACnet Profile	B-AAC ¹
EOL Resistor	Built-in, jumper selectable
Baud Rates	9600, 19 200, 38 400, or 76 800 bps
Addressing	Dip switch or with an Allure EC-Smart-View Series Communicating Sensor

1. Refer to Distech Controls' Protocol Implementation Conformity Statement for BACnet.

Subnetwork

Communication	RS-485
Cable	Cat 5e, 8 conductor twisted pair
Connector	RJ-45
Connection Topology	Daisy-chain

Room Devices Support

Maximum combined number of devices per controller	12 ¹
Allure EC-Smart-View Series	Up to 12
Allure EC-Smart-Comfort Series (not supported by UUKL)	Up to 6
Allure EC-Smart-Air Series (not supported by UUKL)	Up to 6

1. A controller can support a maximum of 2 Allure sensor models equipped with a CO₂ sensor. Any remaining connected sensors must be without a CO₂ sensor.

Hardware

Processor	STM32 (ARM Cortex™ M3) MCU, 32 bit
CPU Speed	72 MHz
Applications Memory	1 MB Non-volatile Flash
Storage Memory	2 MB Non-volatile Flash

RAM Memory	96 kB RAM
Real Time Clock (RTC)	Built-in Real Time Clock with rechargeable battery Network time synchronization is initially required
RTC Battery	20 hours charge time, 20 days recharge time Up to 500 charge/discharge cycles
Green LEDs	Power status & LAN Tx
Orange LEDs	Controller status & LAN Rx
Communication Jack	BACnet 1/8" (3.5mm) stereo audio jack

I/O Extension Modules (ECx-400 Series)

Communication	RS-485
Number of I/O extension modules per controller	Up to 2, in daisy-chain configuration

Wireless Receiver

Communication Protocol	EnOcean wireless standard ¹
Number of Wireless Inputs ²	28
Supported Wireless Receivers	Refer to the Open-to-Wireless Application Guide
Cable	Telephone cord
Connector	4P4C modular jack
Length (maximum)	2m (6.5ft)



1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Application Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

Mechanical

Dimensions (H × W × D) ECB-600 / 610	4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47 mm)
Dimensions (H × W × D) ECB-650	4.7 × 7.7 × 2.55" (119.38 × 195.58 × 64.68 mm)
Shipping Weight ECB-600 / 610	1.17lbs (0.53 kg)
Shipping Weight ECB-650	1.28lbs (0.58 kg)
Enclosure Material ¹	FR/ABS
Enclosure Rating	Plastic housing, UL94-5VB flammability rating Plenum rating per UL1995
Installation	Direct DIN-rail mounting or wall mounting through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature	32°F to 122°F (0°C to 50°C)
Storage Temperature	-4°F to 122°F (-20°C to 50°C)
Relative Humidity	0 to 90% Non-condensing

Standards and Regulation

CE Emission	EN61000-6-3: 2007; A1:2011
CE Immunity	EN61000-6-1: 2007
FCC	Compliance with FCC rules part 15, subpart B, class B
UL Listed (CDN & US)	UL916 Energy management equipment
UL 864	UL 864, 10 th Edition, UUKL Listed Smoke Control Equipment (ECB-600 UUKL model only) ¹
California State Fire Marshal Listing	CSFM: 7300-2187:0100 (ECB-600 UUKL model only) ¹
CEC Appliance Database	Appliance Efficiency Program ²



1. For detailed specifications regarding the ECB-600 UUKL model, refer to the Distech Controls UUKL Smoke Control Design Guide.
2. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.

ECB-650 Display

Display Type	Backlit-color LCD
Display Resolution	400 W x 240 H pixels (WQVGA)
Effective Viewing Area (W × H)	2.4 × 1.4" (61.2 × 36.7mm) diagonal: 2.8" (71mm)
Menu Navigation	Jog dial turn, select navigation with Exit button

Universal Inputs (UI)

General

Input Type	Universal; software configurable
Input Resolution	16-Bit analog / digital converter
Power Supply Output	15VDC; maximum 320mA

Contact

Type	Dry contact
------	-------------

Counter

UI1 to UI4:

Type	SO output compatible
Maximum Frequency	50Hz maximum
Minimum Duty Cycle	10milliseconds On / 10milliseconds Off

UI5 to UI10:

Type	Dry contact
Maximum Frequency	1Hz maximum
Minimum Duty Cycle	500ms On / 500ms Off

0 to 10VDC

Range	0 to 10VDC (40kΩ input impedance)
-------	--------------------------------------

0 to 5VDC

Range	0 to 5VDC (high input impedance)
-------	-------------------------------------

0 to 20mA

Range	0 to 20mA 249Ω jumper configurable internal resistor
-------	---

Resistance/Thermistor

Range 0 to 350 K Ω

Supported Thermistor Types Any that operate in this range

Pre-configured Temperature Sensor Types:

Thermistor 10K Ω Type 2, 3 (10K Ω @ 77°F; 25°C)

Platinum Pt1000 (1K Ω @ 32°F; 0°C)

Nickel RTD Ni1000 (1K Ω @ 32°F; 0°C)
RTD Ni1000 (1K Ω @ 69.8°F; 21°C)

Universal Outputs (UO)

General

Output Type	Universal; software configurable
Output Resolution	10-bit digital to analog converter
Output Protection	Built-in snubbing diode to protect against back-EMF, for example when used with a 12VDC relay Output is internally protected against short circuits
Load Resistance	Minimum 200 Ω for 0-10VDC and 0-12VDC outputs Maximum 500 Ω for 0-20mA output
Auto-reset fuse	Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range 0 or 12VDC

Source Current Maximum 60 mA at 12VDC (minimum load resistance 200 Ω)

PWM

Range Adjustable period from 2 to 65 seconds

Thermal Actuator Management Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time 500 milliseconds

Drive Time Period Adjustable

0 to 10VDC

Range 0 to 10VDC

Source Current Maximum 60 mA at 10VDC (minimum load resistance 200 Ω)

0 to 20mA

Range 0 to 20mA

Type Current source (jumper configurable)


HOA

Hand-Off-Auto switch When equipped.
Supervision allows control logic to read the current HOA switch and potentiometer settings

Threshold Configurable

Potentiometer Voltage Range 0 to 12.5VDC

Dimensions

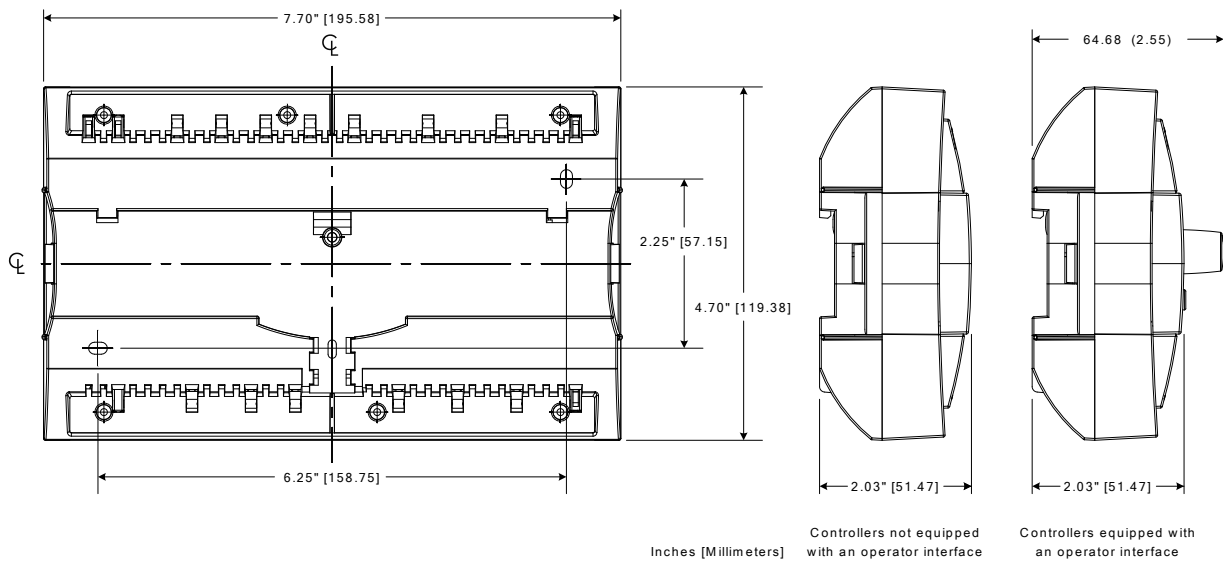

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, EC-Net, ECO-Vue, Allure, and Open-To-Wireless are trademarks of Distech Controls Inc.; Lon-Works, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; Niagara Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2011 - 2022. All rights reserved.

Global Head Office - 4205 place de Java, Brossard, QC, Canada, J4Y 0C4 - EU Head Office - ZAC de Sacuny, 558 avenue Marcel Mérieux, 69530 Brignais, France